



PHOENIX SCAFFOLDING & EQUIPMENT INC.

CELEBRATING OVER 25 YEARS SERVING OUR COMMUNITY!

Thank you for over 25 years of patronage! Your loyalty has helped to make us one of the largest and most respected scaffolding companies in Arizona.

Our Services:

- RENTAL AND SALES
- TUBULAR AND SYSTEM STAIR TOWERS
- TUBULAR AND SYSTEM SCAFFOLD
- SCAFFOLD ENGINEERING
- SAFETY EQUIPMENT
- TRASH CHUTES
- SWING STAGES
- BLEACHERS
- TILT BRACES
- SHORING

ASSEMBLY AND DELIVERY STATEWIDE

Phoenix Scaffolding is proud of our outstanding **safety** record and all our scaffolding is **OSHA Compliant**. Our **knowledgeable, experienced** staff will provide your scaffolding needs in a highly **safe** and **professional** manner. Our company is **experienced** in all types of scaffolding creation, including **high rise structures** and other **intricate, time and security restricted projects**.

Give us a call..... **602-437-1078**

ARIZONA'S LEADING SCAFFOLDING SPECIALISTS

Phoenix Scaffolding
& Equipment Inc.
4143 East Winslow Ave.
Phoenix, Arizona 85040

602-437-1078

FAX: 602-437-1438

www.phoenixscaffolding.com



Over 25 Years of Experience to make your next project a high quality and profitable one!

Phoenix Scaffolding and Equipment Inc. 4143 East Winslow Ave. Phoenix, Arizona 85040 Phone: 602-437-1078 Fax: 602-437-1438

ALL PLANK ARE:

1. RODDED
2. CLIPPED
3. PAINTED ENDS
4. MILLGRADED - FOR YOUR PROTECTION
5. MEET OR EXCEED OSHA REQUIREMENTS
6. BRANDING ON REQUEST

SOUTHERN YELLOW PINE

SIZES: 2 X 10 X 9 FT. LONG
2 X 10 X 12 FT. LONG
2 X 10 X 16 FT. LONG



ALUMINUM WITH PLYWOOD HOOK PLANK

SIZES: 19" X 7 FT. LONG
19" X 10 FT. LONG



ALL ALUMINUM HOOK PLANK

SIZES: 19" X 7 FT. LONG
19" X 10 FT. LONG



ALUMINUM PICK / STAGE / DECK

SIZES: 24" WIDE X 16 FT. TO 39 FT. LONG
(GUARD RAILS OPTIONAL)




SNAP - ON LOCKING SYSTEM




**"SNAP ON"
LOCK EXAMPLE**




3' X 40'' BOX

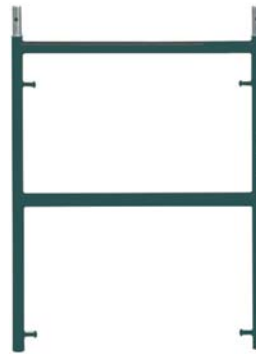

3' X 4' BOX

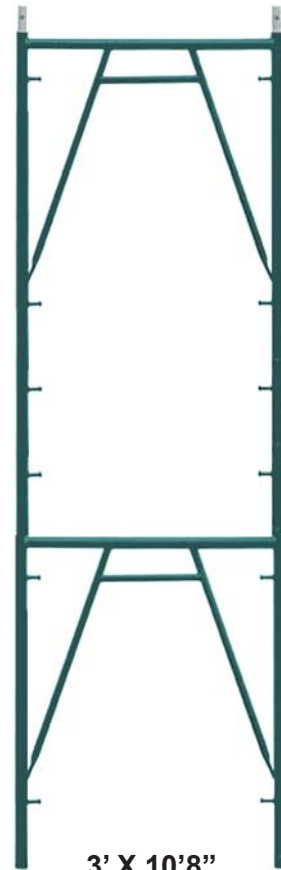

**3' X 10'8''
APARTMENT FRAME**

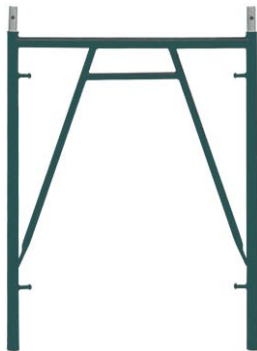


3' X 4' WALK THRU




3' X 5' WALK THRU




**2' X 6'8'' WALK THRU
3' X 6'8'' WALK THRU**

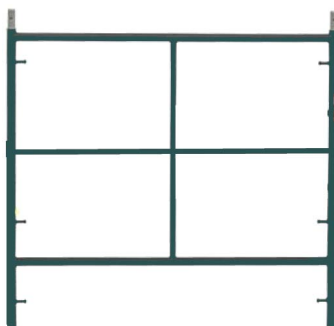

**5' X 40'' BOX
5' X 4' BOX**

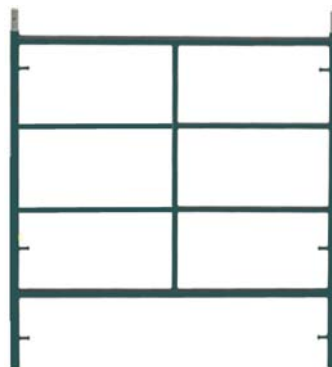

5' X 5' BOX

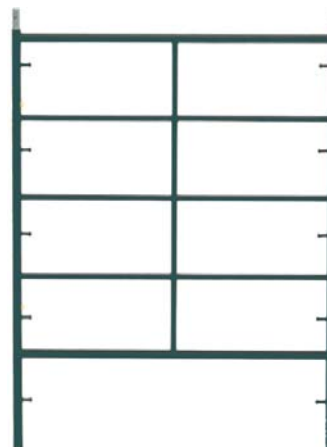

5' X 6'8'' BOX




5' X 6'8'' WALK THRU


FLIPLOCKS (USES PUNCHED HOLE ACCESSORIES)




**"FLIP LOCK"
LOCK EXAMPLE**




5' X 4'1" BOX

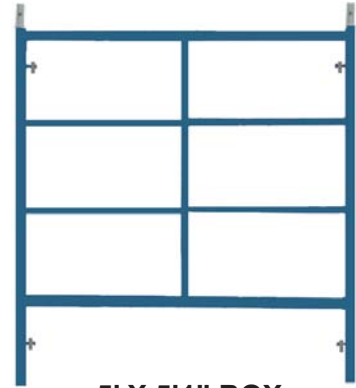


5' X 5'1" BOX

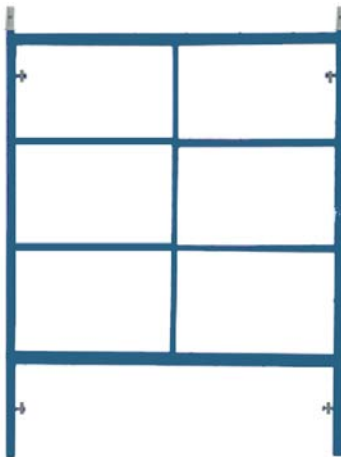


5' X 6'7" BOX

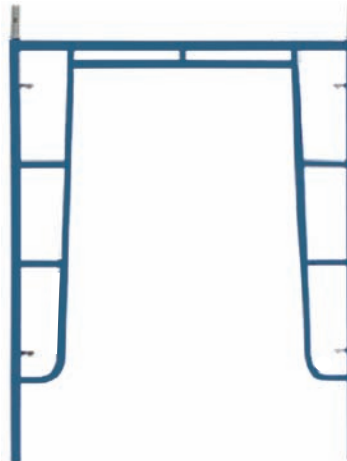


5' X 6'7" WALK THRU

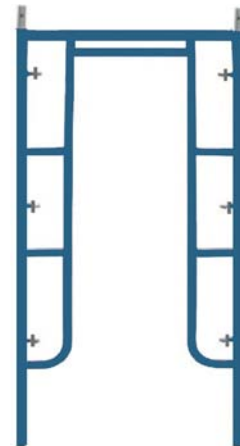

3' X 6'7" WALK THRU

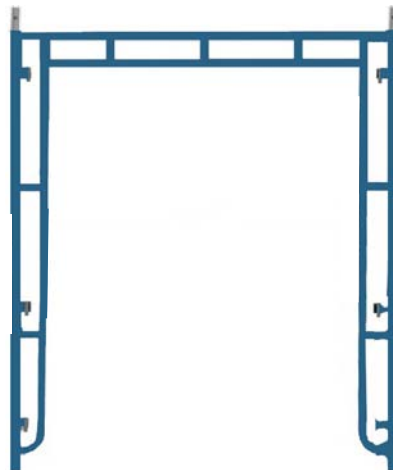

6' X 7'6" CANOPY FRAME

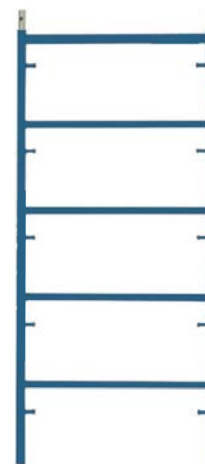

LADDER FRAME

2' X 5' HIGH
2' X 6'8" HIGH
3' X 6'8" HIGH

SCAFFOLD ACCESSORIES



SNAP-ON CROSS BRACES

5' X 32"
5' X 4'
7' X 32"
7' X 4'
10' X 32"
10' X 4'



PUNCHED HOLE CROSS BRACES

5 X 2
5 X 3
5 X 4
7 X 2
7 X 3
7 X 4
10 X 2
10 X 3
10 X 4



SNAP-ON SAFETY RAIL

3 FT. RAIL
5 FT. RAIL
7 FT. RAIL
10 FT. RAIL



PUNCHED HOLE SAFETY RAIL

3 FT. RAIL
5 FT. RAIL
7 FT. RAIL
10 FT. RAIL



5' X 6'7" BOX

8'
10'
12'
16'




PUTLOGS

8'
10'
12'
16'



16'
20'
22'

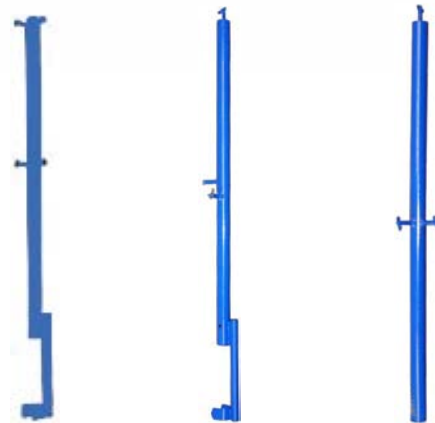

GUARD RAIL POSTS

GRP - RIVETS GRP - FLIPLOCKS GRP - NO STEM

ANY SIZE AVAILABLE UPON REQUEST

SCAFFOLD ACCESSORIES



SCAFFOLD CASTERS

5"
8"
12"



5" BASE
PLATE



SWIVEL
BASE PLATE



24" EXTENSION
BASE PLATE




24" SCREW
JACK W/
BASE PLATE



24" SCREW
JACK W/
SOCKET



SWIVEL CLAMP



RIGHT ANGLE CLAMP



SNAP-ON COUPLING
PIN 15/16" DIAMETER



PUNCH HOLE COUPLING
PIN 15/16" DIAMETER



SPRING RETAINER



GRAVITY LOCK PIN



SNAP PIN



TOGGLE PIN



SELLOCK
(ROLL) PIN



RIVET & COTTER
HITCH PIN SET



RIVET



DROPLock



FLIPLOCK



SPEEDLOCK




SADDLE PIN



HALF RUNG



WHEEL PULLEY

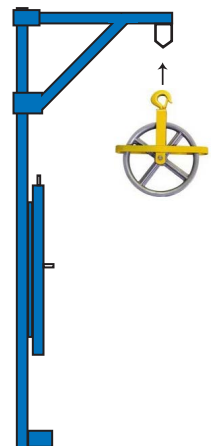

HOIST ARM & BRACKET
(WHEEL SOLD SEPERATELY)

ROLLING SCAFFOLD




**6' STEEL
MULTI-FUNCTION
SCAFFOLD**



**6' STEEL MFS
GUARD RAIL SYSTEM**

ALL NEW AND IN STOCK!

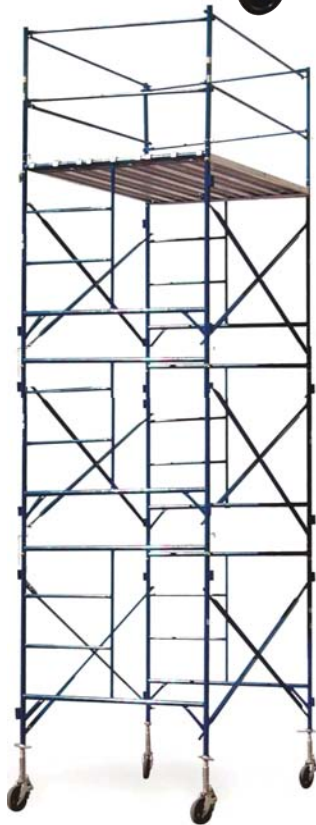

5' WIDE ROLLING SCAFFOLDING TOWERS

5' WIDE BY 7' AND 10' LONG SNAP-ON FRAMES QUOTED ON THIS STYLE UNLESS OTHERWISE REQUESTED.


TOWERS QUOTED AT HEIGHTS OF 5', 10', 15', 20', 25 AND 30'.

ADD 8" FOR CASTERS. OUTRIGGERS NEEDED ABOVE 20'.

(ADDITIONAL SET OF 4 CASTERS WOULD BE NEEDED WITH OUTRIGGERS).

7' ALUMINUM HOOK PLANK LOAD IS 75 LBS. PER SQ. FT.

10' ALUMINUM HOOK PLANK LOAD IS 50 LBS. PER SQ. FT.

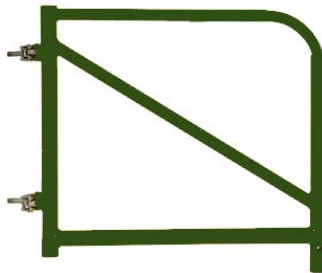

**ROLLING TOWER
OUTRIGGER
(FRAME SCAFFOLD)**



**STEEL MFS
18" OUTRIGGER**



SCAFFOLD CASTERS


5"

8"

12"


TECHNICAL INFORMATION

LOAD CHART

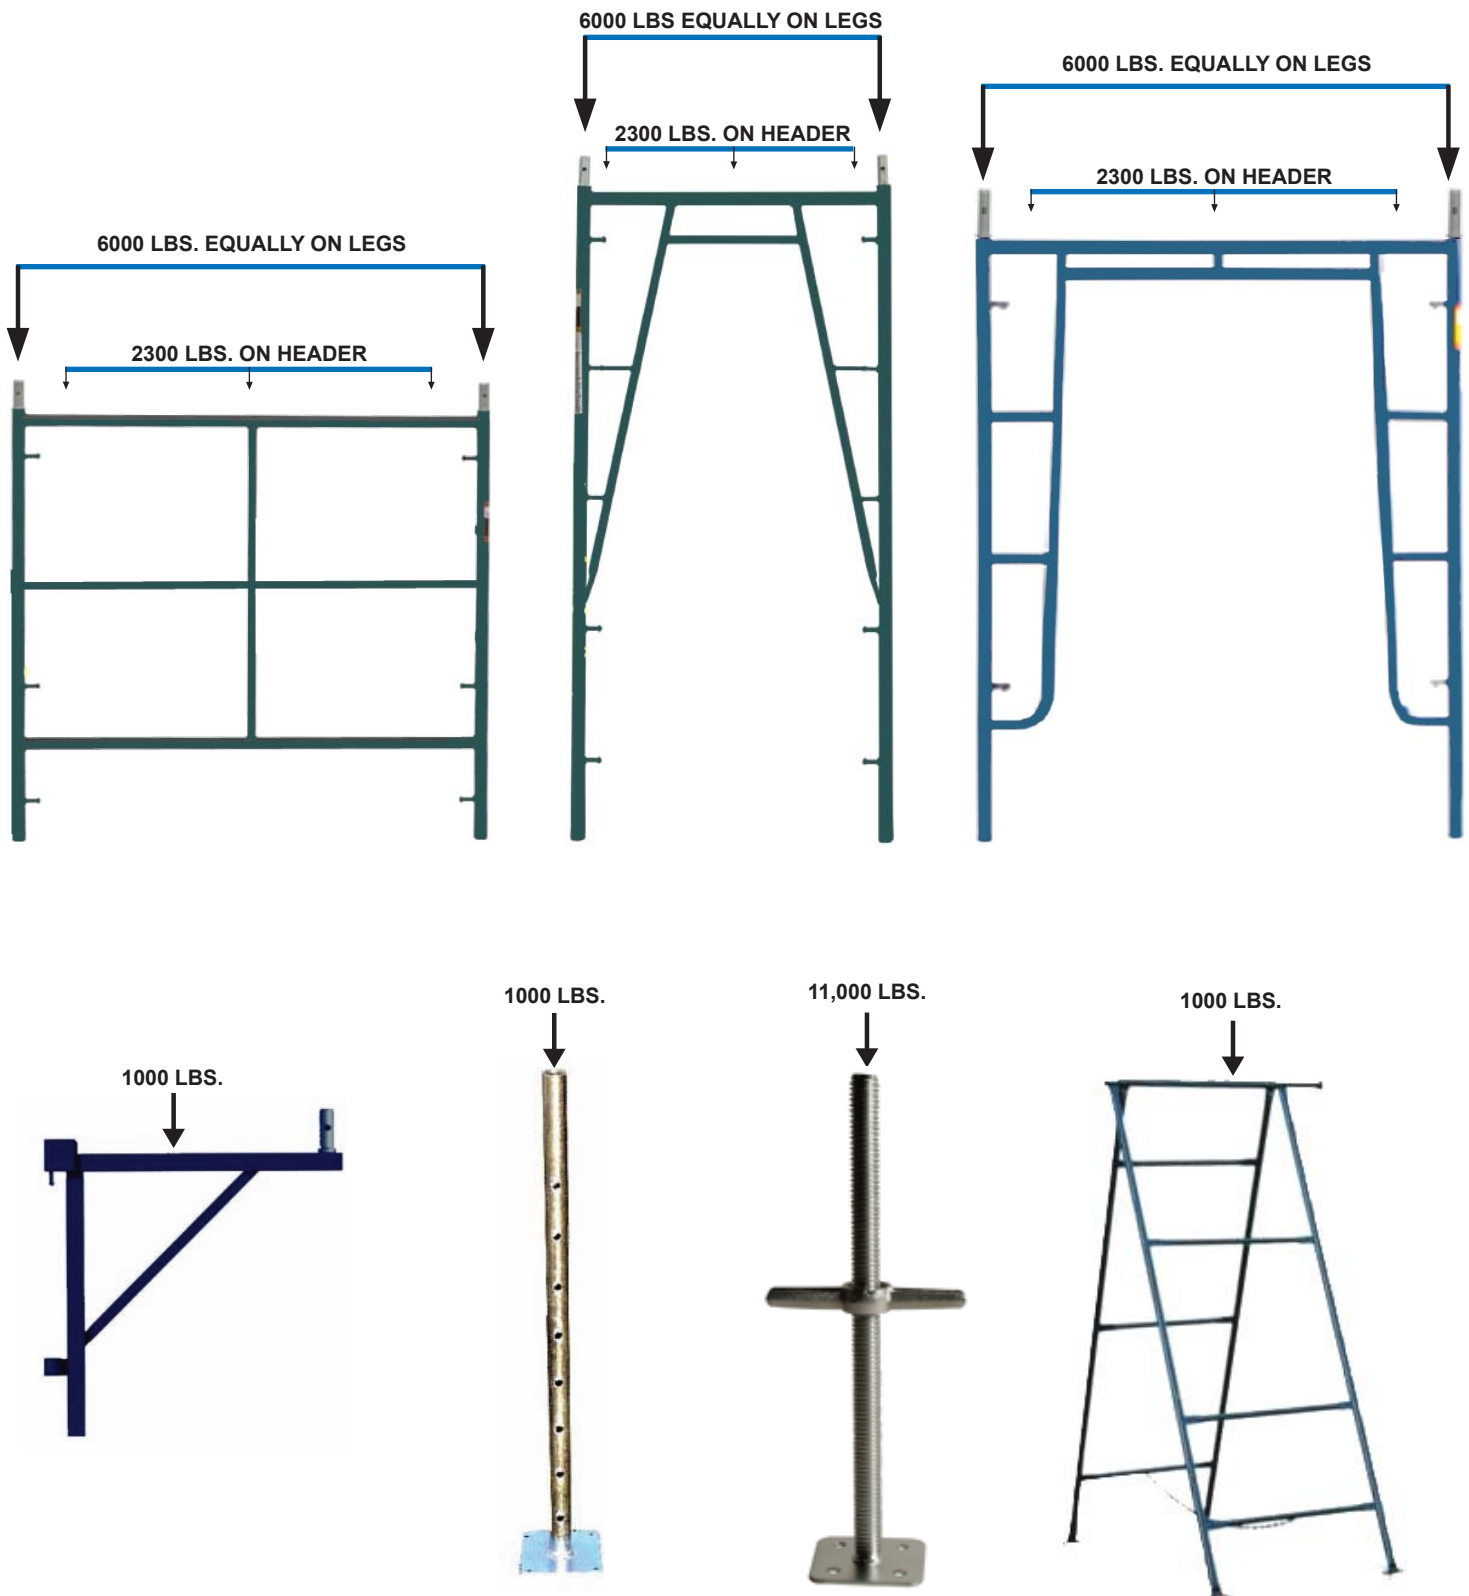

SYSTEM SCAFFOLDING


RING LOCK SYSTEM

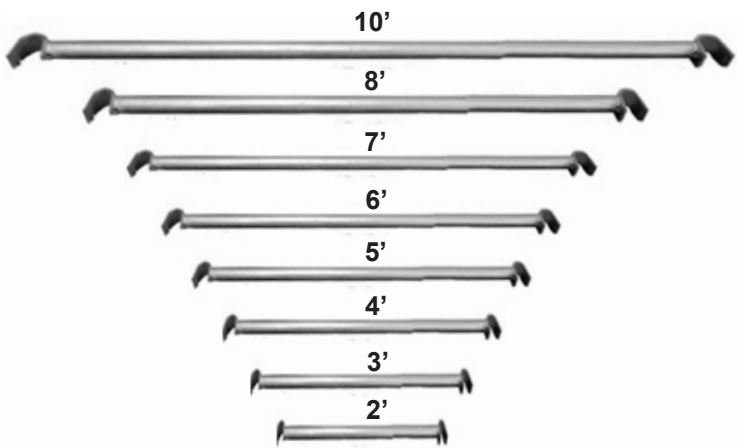

HORIZONTAL LEDGER




SYSTEM TRUSS
10'
8'

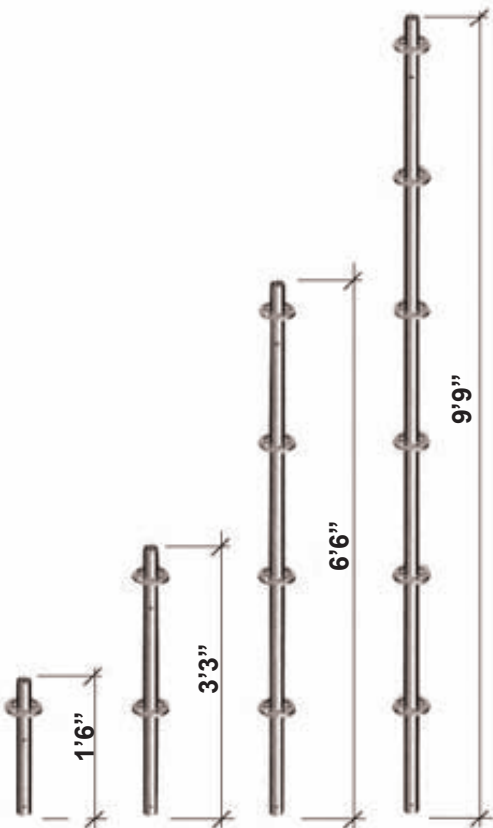

SYSTEM POSTS



STEEL PLANK
10'
8'
5'

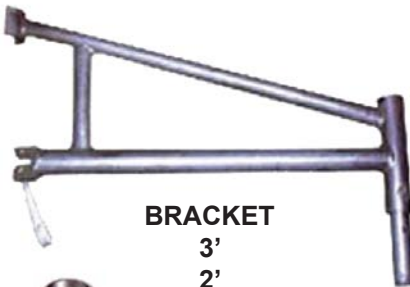

BRACKET
3'
2'



STARTER BASE



SYSTEM SCREW JACK

TRASH CHUTES / STAIR UNITS



Clean large volumes of debris directly into containers. Use from buildings of all heights. Easy, Safe & Efficient.

DOOR & TOP HOPPER SECTIONS:

- Permit debris to be cleared from every floor
- Quick & easy to install
- Tight fit keeps dust to a minimum
- Outstanding resistance to cold, heat, abrasion
- Any 3 sections connected together = 10 ft.
- Create systems up to 100 ft in length

SYSTEMS ACCESS STAIRS

Most of the scaffolding structures, need internal stair towers for easy access of the heights. System stairs are wide enough to allow two people to utilize them simultaneously, allowing for traffic to move up and down efficiently.

STEEL STAIR UNITS



Steel stair towers are an efficient way to furnish temporary access to rooftops and floors when interior stairways have not been constructed. They also can provide multiple access to large or congested jobsites where emergency exits are required.



STANDARD POST SHORES

Post Shore Description	Weight lbs.
Shore Base.....	24.5

#1 POST SHORE - 6'2" TO 11'1" ADJUSTMENT


With 6" x 9" Plate Head	52.0
With 4" x 8" J Head	44.5
With 4" x 14" J Head	50.4
With 5" x 8" U Head	43.5
With 6" x 6" Plate Head With Hole for 0304-XX J Head	42.5
With 8" x 8" U Head	53.5

#2 POST SHORE - 8'2" TO 13'1" ADJUSTMENT


With 6" x 9" Plate Head	62.0
With 4" x 8" J Head	49.5
With 4" x 14" J Head	52.5
With 6" x 6" Plate Head With Hole for 0304-XX J Head	47.5
With 8" x 8" U Head	58.5

#3 POST SHORE - 10'9" TO 15'7" ADJUSTMENT


With 4" x 8" J Head	59.0
With 6" x 6" Plate Head With Hole for 0304-XX J Head	57.0

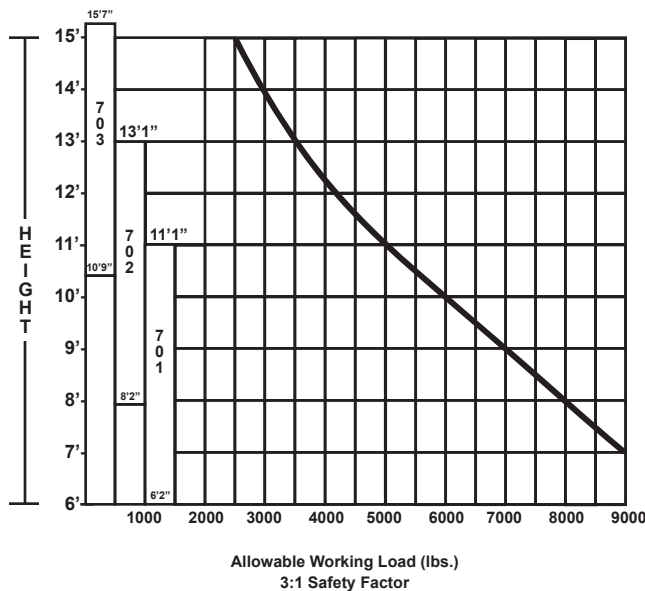

Standard Post Shores	
(Minimum Hts.)	(Maximum Hts.)
6'2"	11'1"
8'2"	13'1"
10'9"	15'7"

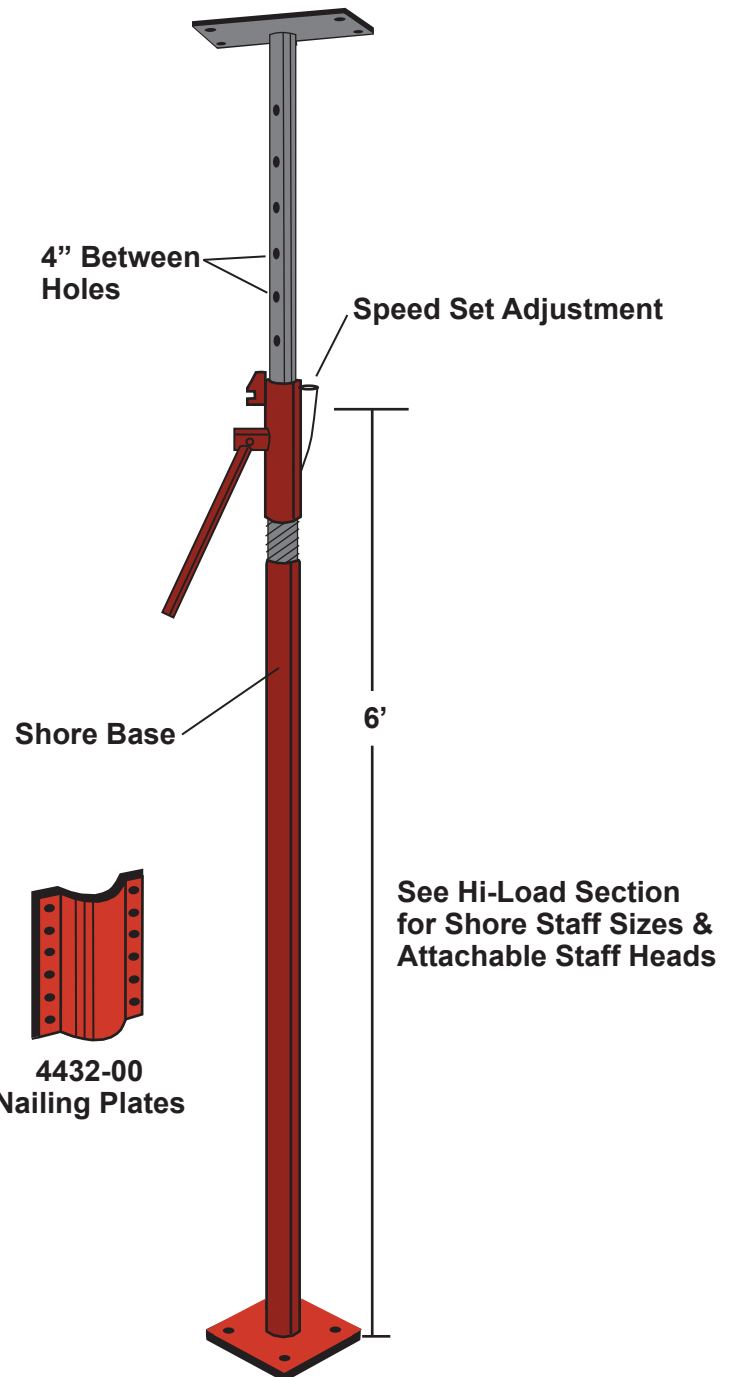

TYPICAL HI-LOAD TOWER

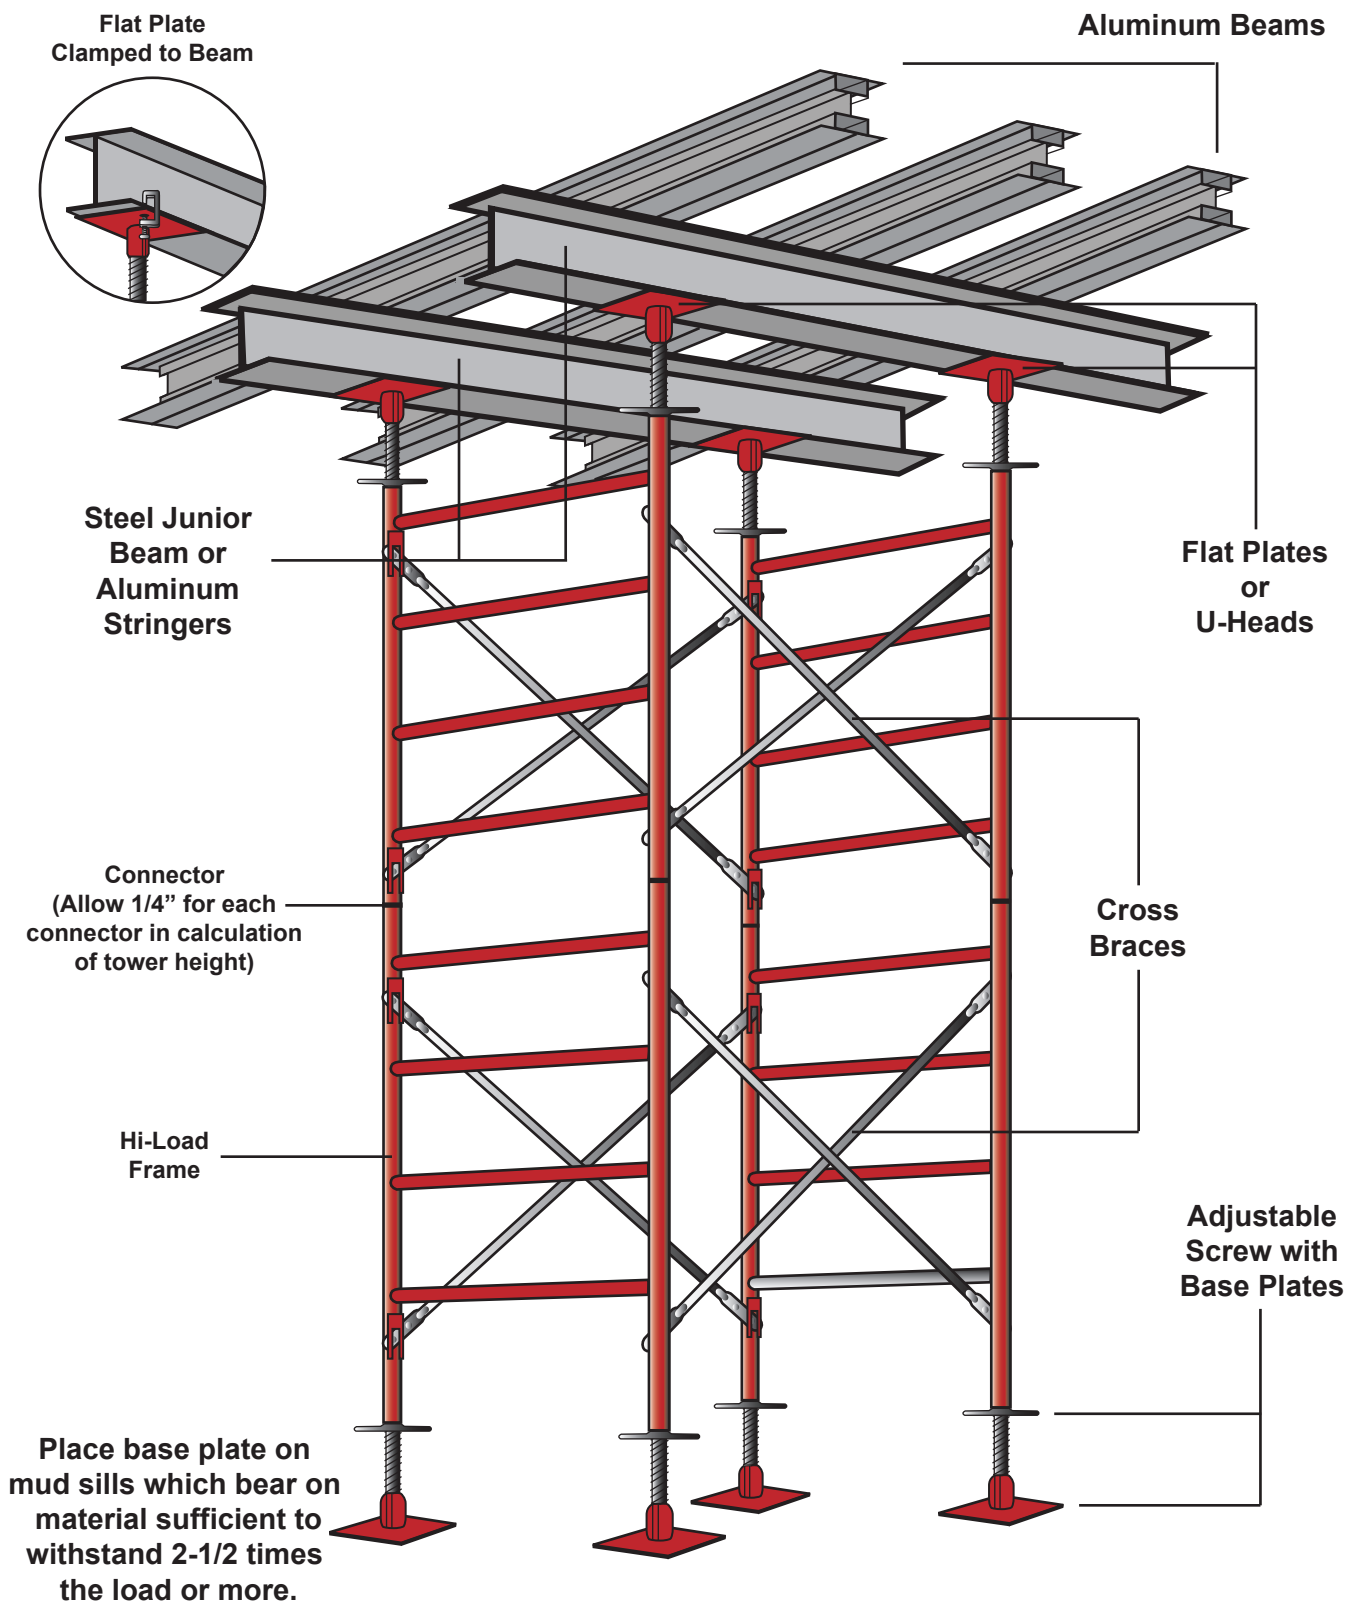


Frame Type Bleachers

Assembly and delivery statewide



5 Row Non-Elevated	Rows 5	Length 21'	Seats 70
-------------------------------	-------------------	-----------------------	---------------------

Frame-type bleachers should meet the same basic criteria as grandstands and stadiums: current design methods, comfort and safety of spectators. Let our sales representatives help you determine the size bleacher you need.

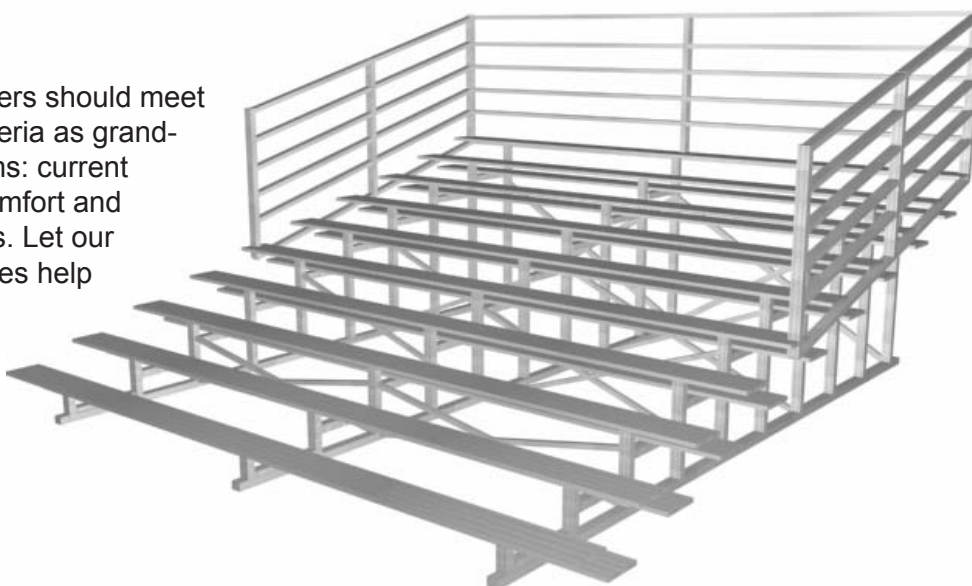

Great for sporting events, parades, graduation ceremonies, festivals, rodeos and special events. A wide range of sizes available to meet most indoor or outdoor seating. Elevated seating upon request. Contact our sales staff with any questions or inquiries.

10 Row Non-Elevated	Rows 10	Length 21'	Seats 140
--------------------------------	--------------------	-----------------------	----------------------

15 Row Non-Elevated	Rows 15	Length 21'	Seats 210
--------------------------------	--------------------	-----------------------	----------------------

SAFETY EQUIPMENT

HARNESSES



Full Body Harness, D-rings center back only.
96305N Small - Large
96306N X - Large

LANYARDS




Ultra-Tube shock-absorbing lanyard.
UT-96516 1" X 6'



Ultra-tube shock-absorbing Y-lanyard with large rebar hooks.
UT-96516YSR 1" X 6'



Nylon web lanyard with double locking snap each end and shock-absorbing pack one end.
96516 1" X 6'

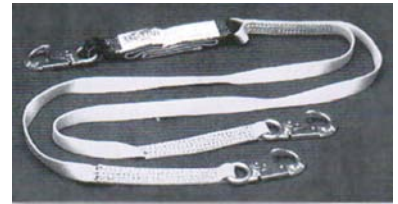

100% tie-off, shock-absorbing Y-lanyard.

96516Y 1" X 6'

RETRACTABLES



US-H50
US-H80
US-H150

Cable Retractable Lanyards

US-H25 3/16" galvanized cable. Length - 25'
US-H50 3/16" galvanized cable. Length - 50'
US-H80 3/16" galvanized cable. Length - 80'
US-H150 3/16" galvanized cable. Length - 150'



1" Nylon Webbing

Web Retractable Lanyards

US-HPB7RG 2" nylon webbing. Length - 7' with roll gate
US-HPB15 1" nylon webbing. Length - 15'
US-HPB25 1" nylon webbing. Length - 25'
US-HPB40 1" nylon webbing. Length - 40'

SAFETY SIGNAGE



Peel & Stick Labels



Tag Holder



FRONT



BACK

Inspection Tag Insert

PLASTER / MORTAR MIXERS

Rugged 14-gauge steel engine covers with punched ventilation openings for increased cooling and added strength.

High strength cast iron paddle arms with wiper blades for a clean, uniform mix.

heavy-duty safety grate with built-in bag cutter.

Durable paddle shaft of 1-3/4" square hardened steel. Double-sealed bearings with eight spring loaded greaseable shaft seals.

Heavy-duty removable tow tongue made of tough schedule 80 steel.

Available with loop coupler, 2" ball coupler or pin-type coupler.

Mechanical drive...

- Ideal for high production.
- Reduced maintenance - hardened drive gear and multiple disc clutch are immersed in oil and fully protected for long, trouble-free life.
- Elimination of high-wear components - V-belts, pulleys and external gears.
- Easily accessible blade engagement lever.

Model WM-120SM (12 cu. ft.) - mechanical drive, manual dump, steel drum - available with EasyClean drum

Model WM-90S (9 cu. ft.) - mechanical drive, manual dump, steel drum - available with EasyClean drum



Solid 1-5/8" square axle with large **B78X13" tires** for smooth towing. Suspension springs standard - less bounce, less sway.

SWING STAGE



Modular Staging

Length	Weight (includes all handrails)
2'	32 lbs.
4'	62 lbs.
6'	83 lbs.
8'	106 lbs.
10'	136 lbs.



90 Degree Corner Section




Rolling Outrigger Assembly



Modular Work Cage

Dimensions: 48" W x 24" D x 108" H.
Weight: 265 lbs.
Rated: 1000 lbs./unit

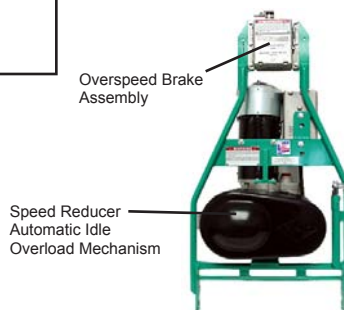

Powered Hoist

Speed Reducer
Automatic Idle
Overload Mechanism

Overspeed Brake
Assembly



24" Parapet Clamp

Length: 60"
Width: 14"
Out reach: 24"
Weight: 65 lbs.
Jaw open up to 24" inches.
Load/Capacity: 1500 lbs./unit
36" available



Steel Parapet Clamp

Length: 48"
Width: 14"
Out reach: 14"
Weight: 55 lbs.
Jaw open up to 24" inches.
Load/Capacity: 1000 lbs./unit
36" available



Cornice Hook

14 inch Hook
Out reach: 6"
Weight: 36 lbs.
Load/Capacity: 1000 lbs.



Roller Bumpers



Aluminum Beam Assembly

PHOENIX SCAFFOLDING AND EQUIPMENT, INC.

ALSO AVAILABLE FOR PURCHASE & DELIVERY

- 1st AID KITS
- SAFETY GLASSES & GOGGLES
- SAFETY VEST
- SAFETY SIGNS
- HARD HATS
- EAR PLUGS
- DUST MASKS
- WORK GLOVES
- CAUTION TAPE (YELLOW)
- DANGER TAPE (RED)
- FIRE EXTINGUISHERS
- TIE WIRE
- 5 & 10 GALLON WATER JUGS
- REPLACEMENT LIDS & SPOUTS FOR WATER JUGS
- CUP DISPENSERS
- DRINKING CUPS
- GENERATORS 6000 & 2500 WATT
- CUT-OFF SAWS
- LADDERS
- LADDER JACKS
- PUMP JACK, BRACE & ANCHOR
- ELECTRICAL CORDS
- WORK LIGHTS
- WATER HOSES
- WHEEL BARROWS
- SHOVELS
- RAKES
- FLOOR SCRAPERS
- PUSH BROOMS
- ROPE
- CHAIN
- DUCT TAPE
- 2 MIL PLASTIC - 8' X 200' & 12' X 200'
- FLOATS
- DIAMOND & ABRASIVE BLADES
- FUEL CANS W/ FUNNEL
- 2 CYCLE OIL



4143 East Winslow Ave. Phoenix, Arizona 85040 (602)437-1078 Fax (602)437-1438

E-mail: info@phoenixscaffolding.com

www.phoenixscaffolding.com

(602)437-1078